




integration with integrity

User's Manual

5.25 Embedded Controller 3307990

Version 1.0

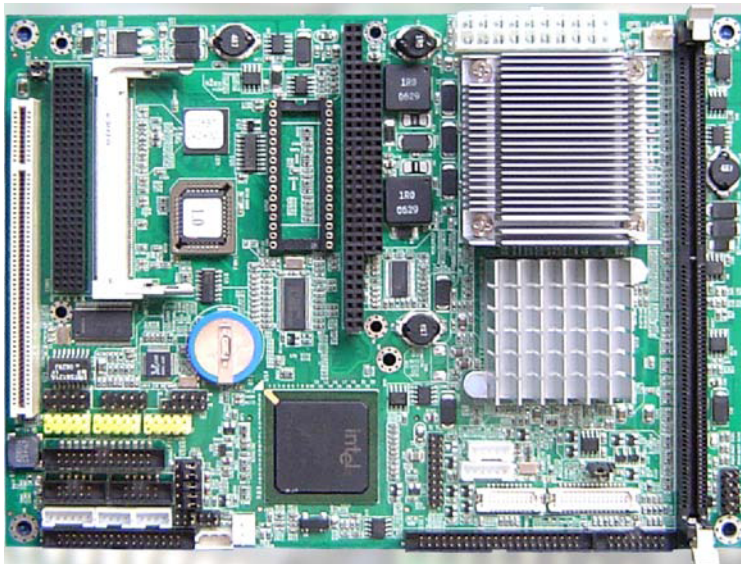

Copyrights

This manual is copyrighted and all rights are reserved. It does not allow any non authorization in copied, photocopied, translated or reproduced to any electronic or machine readable form in whole or in part without prior written consent from the manufacturer.

In general, the manufacturer will not be liable for any direct, indirect, special, incidental or consequential damages arising from the use of inability to use the product or documentation, even if advised of the possibility of such damages. The manufacturer keeps the rights in the subject to change the contents of this manual without prior notices in order to improve the function design, performance, quality and reliability. The author assumes no responsibility for any errors or omissions, which may appear in this manual, nor does it make a commitment to update the information contained herein.

Trademarks

Intel is a registered trademark of Intel Corporation.

Award is a registered trademark of Award Software, Inc.

All other trademarks, products and or product's name mentioned herein are mentioned for identification purposes only, and may be trademarks and/or registered trademarks of their respective companies or owners.

Table of Contents

| | |
|---|-----------|
| Chapter 1 Introduction | 1 |
| 1.3 Warning | 2 |
| 1.4 Replacing the lithium battery | 3 |
| 1.5 Technical Support | 3 |
| 1.7 Packing list | 5 |
| 1.8 Cable Kit | 5 |
| 1.9 Ordering Information | 6 |
| 1.10 Specification | 7 |
| 1.11 Board dimensions | 8 |
| Chapter 2 Installation | 9 |
| 2.1 Board layout | 10 |
| 2.2 Jumpers and Connectors | 11 |
| Chapter 3 Appendix | 56 |
| 3.1 I/O Map | 57 |
| 3.2 IRQ M | 58 |

Chapter 1

Introduction

1.3 Warning

Single Board Computers and their components contain very delicate Integrated Circuits (IC). To protect the Single Board Computer and its components against damage from static electricity, you should always follow the following precautions when handling it :

1. Disconnect your Single Board Computer from the power source when you want to work on the inside
2. Hold the board by the edges and try not to touch the IC chips, leads or circuitry
3. Use a grounded wrist strap when handling computer components.
4. Place components on a grounded antistatic pad or on the bag that came with the Single Board Computer, whenever components are separated from the system

1.4 Replacing the lithium battery

Incorrect replacement of the lithium battery may lead to a risk of explosion. The lithium battery must be replaced with an identical battery or a battery type recommended by the manufacturer. Do not throw lithium batteries into the trashcan. It must be disposed of in accordance with local regulations concerning special waste.

1.5 Technical Support

Please do not hesitate to call or e-mail our support service should you have any questions:

(800) 833-8999

E-mail: support@globalamericaninc.com

<http://www.golobalamericaninc.com>

1.7 Packing List

Before you begin installing your single board computer, please make sure that the following materials have been shipped:



1 x 3307990 embedded board



1 x Quick Installation Guide



1 x CD-ROM (for Driver used)

1.8 Cable Kit

3307990A (Standard Version) Cable Kit (1208605) contains the followings:

Content

1. 1 x AUDIO Cable
2. 3 x USB 2 port Cable
3. 1 x IDE Cable
4. 1 x FDD Cable
5. 1 x VGA Cable
6. 1 x RJ-45 Ethernet LAN Cable
7. 1 x KB-MS Cable
8. 1 x Parallel Cable
9. 2 x COM Cable
10. 1 x TV-out Cable (optional)

1.9 Ordering Information

3307990 B

Same as 3307990A, but with embedded FANLESS Ultra Low Voltage Intel Celeron M 600 MHz Processor

3307990 A

5.25" Embedded Controller with Socket 478 Intel Pentium M / Celeron M up to 2.1 GHz processor, FSB 400 MHz, with CRT / LCD / DVI / TV-out, LAN, PC/104, PC/104 Plus, Compact Flash and DOC Socket

1208605

Cable Kit (for 3307990)

1.10 Specification

| | |
|--------------------------|--|
| Product Name | 3307990 |
| Form Factor | 5.25" Embedded Board Size (203x146mm) |
| Processor | Intel Ultra Low Voltage Celeron M 600MHz CPU |
| | Intel Ultra Low Voltage Celeron M 1GHz CPU |
| | Intel Low Voltage Pentium M 1.4GHz CPU |
| | Intel Pentium M Dothan Socket478 CPU up to 2.1 GHz FSB 400MHz |
| Chipset | NB: Intel 852GM SB: Intel ICH4 |
| System Memory | 1 DDR DIMM Support DDR SDRAM Up to 1GB |
| VGA/LCD Controller | UMA 852GM AGP Video Controller with LVDS and CRT support (Support Dual Display, Independent display) |
| | |
| Ethernet | Intel 82562 ET/EZ 10/100 Base-T Fast Ethernet LAN |
| I/O Chips | WINBOUND W83627HF |
| BIOS | Phoenix-Award BIOS version 6.0PG, Support 4MB Flash ROM |
| | |
| Audio | AC97 Codec Version:2.3 supports MIC-In/ Line-In/ Line-out Optional Stereo Amplifier included (ALC655) |
| | |
| IDE Interface | ATA-100 x 1 channel (Support two ATAPI devices) |
| | Compact Flash Disk X 1 (Support up to 2GB) |
| IEEE 1394a-2000 | N/A |
| Serial Port | Six COM ports: COM 1,2: RS232/422/485 Selectable COM 3~6 : RS-232 (on daughter board P/N 1008000 optional) |
| | |
| Parallel Port | Parallel Port Supports SPP/ EPP/ ECP mode |
| K/B and Mouse | Support Standard PS/2 K/B and Mouse |
| Universal Serial Bus | 6 x USB 2.0 Port |
| Expansion Interface | PCI slot, PC104/PC104plus, Mini-PCI |
| Watchdog Timer Chipset | Integrated in W83627HF , 1~255 Level (sec or min) |
| Hardware Monitor Chipset | Integrated in W83627HF |
| RTC | Support Real Time Clock |
| Power Input Connector | 2x10 Pin ATX (AT power can be used) |
| Operation Temp. | 0°C ~ 60°C (-40°C ~ 85°C, optional) |



Chapter 2

Installation

2.2 Jumpers and Connectors

Jumpers Setting

| Label | Function |
|-----------------|--|
| JBAT1 | CMOS Jumper Settings Clear CMOS |
| JRS1/JRS2 | COM1/COM2 RS-232 / 422 / 485 Select |
| JV1,JV2,JV3,JV4 | COM1/COM2 Power Source Special Support |
| JDOC1 | DOC Address select |
| JVLCD1 | LVDS Panel Voltage Selects |

JBAT1: CMOS Jumper Settings

Type: onboard 3-pin header

| CMOS | JBAT1 |
|------------|--------|
| Keep CMOS | 1-2 ON |
| Clear CMOS | 2-3 ON |



JBAT1

Default setting: Keep CMOS

JRS1: COM1 RS-232 / 422 / 485 Select

Type: onboard 6-pin (2*3) header

| JRS1 Select | 1-2 | 3-4 | 5-6 |
|-------------|-----|-----|-----|
| RS-232 | ON | OFF | OFF |
| RS-422 | OFF | ON | OFF |
| RS-485 | OFF | OFF | ON |



JRS1

Default setting: RS-232 mode

JRS2: COM1 RS-232 / 422 / 485 Select

Type: onboard 6-pin (2*3) header

| JRS2 Select | 1-2 | 3-4 | 5-6 |
|-------------|-----|-----|-----|
| RS-232 | ON | OFF | OFF |
| RS-422 | OFF | ON | OFF |
| RS-485 | OFF | OFF | ON |




JRS2

Default setting: RS-232 mode

JV1,JV3: COM1 Power Source Special Support

Type: onboard 2*3-pin header

| COM1 Power Source Special Support | JV3 | JV1 |
|-----------------------------------|-----|-----|
| Standard | 1-2 | 1-2 |
| POS:5V on Pin1 | 2-3 | 1-2 |
| POS:12V on Pin9 | 1-2 | 2-3 |
| POS:5V on Pin1,12V on Pin9 | 2-3 | 2-3 |




Default setting: Standard

JV2,JV4: COM2 Power Source Special Support

Type: onboard 2*3-pin header

| COM2 Power Source Special Support | JV4 | JV2 |
|-----------------------------------|-----|-----|
| Standard | 1-2 | 1-2 |
| POS:5V on Pin1 | 2-3 | 1-2 |
| POS:12V on Pin9 | 1-2 | 2-3 |
| POS:5V on Pin1,12V on Pin9 | 2-3 | 2-3 |



Default setting: Standard

JDOC1: DOC Address Selects

Type: onboard 4-pin header

| Address | JDOC1 |
|---------|-------|
| D000 | 1-2 |
| D800 | 3-4 |

JVLCD1: LVDS Panel Voltage Selects

Type: onboard 3-pin header

| LCD Voltage | LCD Voltage |
|-------------|-------------|
| 5V | 3.3V |
| 3.3V | 5.0V |



Default setting:3.3V

Connectors

| Label | Function |
|--------------|---------------------------------------|
| JFRT1 | Front Panel (Switches and Indicators) |
| VGA1 | CRT Display |
| IDE1 | Primary IDE Connector |
| DIMM1 | 184 Pin DDR DMM Socket |
| LPC1 | Low Pin Connector |
| DOC1 | DOC connector |
| JSMB1 | SM BUS |
| FDD1 | Floppy Disk Drive Connector |
| CPUF1 | CPU Fan connector |
| SYSF1 | System Fan connector |
| COM1 | Serial Port 1 |
| COM2 | Serial Port 2 |
| JCOM1 | RS-422 / 485 Output |
| JCOM2 | RS-422 / 485 Output |
| KBM1 | PS/2 Keyboard and Mouse |
| LPT1 | Parallel Port |
| USB1 | USB 1/2 Connector |
| USB2 | USB 3/4 Connector |
| USB3 | USB 5/6 Connector |
| TV1 | TV OUT Connector |
| INV1 | LCD Inverter Connector |
| LVDS1 | LVDS LCD Panel Connector |
| TMDS1 | DVI Connector |
| IR1 | Infrared (IR) Connector |
| LAN1 | Ethernet Connector |
| LLED1 | LAN LED Connector |
| AUDIO1 | Audio Interface Port |
| CFD1 | Compact Flash Socket |
| PC104 | PC104 for ISA Interface |
| MPCI1 | Mini PCI Slot |
| CON1 | PC104 + Connector |
| PCI1 | PCI Slot |
| ATX1 | ATX Power Connector |

JFRT1: Switches and Indicators


Type: onboard 2.54 pitch 10-pin (2*5) header

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | RESET + | 2 | RESET - |
| 3 | Power LED+ | 4 | Power LED- |
| 5 | HD LED+ | 6 | HD LED- |
| 7 | Speak+ | 8 | Speak- |
| 9 | PSOIN+ | 10 | PSOIN- |



JFRT1


FRONT PANEL



VGA1: CRT Display Connector

Type: Onboard 2.0mm 2X8 Pin Box Header

| Pin | Description | Pin | Description |
|-----|---------------|-----|-------------|
| 1 | RED | 2 | GREEN |
| 3 | BLUE | 4 | N/C |
| 5 | GND | 6 | GND |
| 7 | GND | 8 | GND |
| 9 | +5V(Poly S/W) | 10 | GND |
| 11 | N/C | 12 | VDDAT |
| 13 | HSYNC | 14 | VSYNC |
| 15 | VDCLK | 16 | N/C |



VGA1

IDE1: Enhanced IDE Connector

Type: onboard 44-pin 2.0mm box headers

| Pin | Description | Pin | Description |
|-----|-------------|-----|--------------|
| 1 | IDE RESET | 2 | GND |
| 3 | DATA7 | 4 | DATA8 |
| 5 | DATA6 | 6 | DATA9 |
| 7 | DATA5 | 8 | DATA10 |
| 9 | DATA4 | 10 | DATA11 |
| 11 | DATA3 | 12 | DATA12 |
| 13 | DATA2 | 14 | DATA13 |
| 15 | DATA1 | 16 | DATA14 |
| 17 | DATA0 | 18 | DATA15 |
| 19 | GND | 20 | N/C |
| 21 | REQ | 22 | GND |
| 23 | IO RWITE | 24 | GND |
| 25 | IO READ | 26 | GND |
| 27 | IO READY | 28 | IDESEL |
| 29 | DACK | 30 | GND |
| 31 | IRQ14 | 32 | N/C |
| 33 | ADDR1 | 34 | ATA66 DETECT |
| 35 | ADDR0 | 36 | ADDR2 |
| 37 | CS#2 | 38 | CS#3 |
| 39 | IDEACTP | 40 | GND |
| 41 | +5V | 42 | +5V |
| 43 | GND | 44 | NC |




IDE1

LPC1: LOW PIN CONNECTOR

Type: onboard 2*10pin 2.0mm PIN headers

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | VCC | 2 | VCC |
| 3 | #LDRQ1 | 4 | GND |
| 5 | SERIRQ | 6 | LAD3 |
| 7 | LAD2 | 8 | LAD2 |
| 9 | LAD0 | 10 | LAD1 |
| 11 | #PCIRST | 12 | GND |
| 13 | SMBDATA | 14 | PCLK |
| 15 | GND | 16 | SMBCLK |
| 17 | 48MHZ | 18 | #LPC_PME |
| 19 | VCC3 | 20 | VCC3 |



LPC1

DOC1: DOC CONNECTOR

Type: onboard 2*10pin 2.0mm PIN headers

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | NC | 32 | VCC |
| 2 | SA16 | 31 | #SMEMW |
| 3 | SA15 | 30 | VCC |
| 4 | SA12 | 29 | SA14 |
| 5 | SA7 | 28 | SA18 |
| 6 | SA6 | 27 | SA8 |
| 7 | SA5 | 26 | SA9 |
| 8 | SA4 | 25 | SA11 |
| 9 | SA3 | 24 | #SMEMR |
| 10 | SA2 | 23 | SA10 |
| 11 | SA1 | 22 | #CE |
| 12 | SA0 | 21 | SD7 |
| 13 | SD0 | 20 | SD6 |
| 14 | SD1 | 19 | SD5 |
| 15 | SD2 | 18 | SD4 |
| 16 | GND | 17 | SD3 |



DOC1

JSMB1: External SMBus Connector

Type: onboard 2.54 pitch 3-pin wafer

| Pin | Description |
|-----|-------------|
| 1 | DATA |
| 2 | CLK |
| 3 | GND |



CPUF1

FDD1: Floppy Disk Drive Connector

Type: onboard standard 2.00pitch 34-pin (2*17) holes

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | GND | 2 | #RWC |
| 3 | GND | 4 | N.C |
| 5 | GND | 6 | #DS1 |
| 7 | #WD | 8 | #INDEX |
| 9 | #WE | 10 | #MOA |
| 11 | #TRAK0 | 12 | #DSB |
| 13 | #WP | 14 | #DSA |
| 15 | #RDATA | 16 | #MOB |
| 17 | #HEAD | 18 | #DIR |
| 19 | #DSKCHG | 20 | #STEP |



FDD1

CPUF1: FAN Connector

Type: onboard 3-pin wafer connector

| Pin | Description |
|-----|-------------|
| 1 | GND |
| 2 | +12V |
| 3 | Fan_Detect |



CPUF1

SYSF1: FAN Connector

Type: onboard 3-pin wafer connector

| Pin | Description |
|-----|-------------|
| 1 | GND |
| 2 | +12V |
| 3 | Fan_Detect |



SYSF1

COM1: RS-232 Serial Port

Type: onboard 2X5-BOX HEADER(2.0mm)

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | DCDA | 2 | SINA |
| 3 | SOUTA | 4 | DTRA |
| 5 | GND | 6 | DSRA |
| 7 | RTSA | 8 | CTSA |
| 9 | RI A | 10 | NC |



COM1

COM2: RS-232 Serial Port

Type: onboard 2X5BOX HEADER(2.0mm)

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | DCDB | 2 | SINB |
| 3 | SOUTB | 4 | DTRB |
| 5 | GND | 6 | DSRB |
| 7 | RTSB | 8 | CTSB |
| 9 | RI B | 10 | NC |



COM2

JCOM1: RS422/485 Output Connector

Type: onboard 2.0pitch 4-pin header

| Pin | RS-422 | RS-485 |
|-----|--------|--------|
| 1 | TX+ | DATA+ |
| 2 | TX- | DATA- |
| 3 | RX+ | N.C |
| 4 | RX- | N.C |



JCOM1

RS-422/RS-485 Select by JRS1, share COM1 resource.

JCOM2: RS422/485 Output Connector

Type: onboard 2.0pitch 4-pin header

| Pin | RS-422 | RS-485 |
|-----|--------|--------|
| 1 | TX+ | DATA+ |
| 2 | TX- | DATA- |
| 3 | RX+ | N.C |
| 4 | RX- | N.C |



JCOM1

RS-422/RS-485 Select by JRS2, share COM2 resource.

KBM1: PS/2 Keyboard & Mouse Connector

Type: onboard 6-pin wafer connector

| Pin | Description |
|-----|-------------|
| 1 | KB_DAT |
| 2 | GND |
| 3 | MS_DAT |
| 4 | KB_CLK |
| 5 | VCC |
| 6 | MS_CLK |



KBM1

LPT1: Parallel Port

Type: onboard 2X13BOX HEADER(2.0mm)

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | #STB | 2 | #AFD |
| 3 | PD0 | 4 | #ERR |
| 5 | PD1 | 6 | #INIT |
| 7 | PD2 | 8 | #SLIN |
| 9 | PD3 | 10 | GND |
| 11 | PD4 | 12 | GND |
| 13 | PD5 | 14 | NC |
| 15 | PD6 | 16 | BUSY |
| 17 | PD7 | 18 | PE |
| 19 | #ACK | 20 | SLCT |



LPT1

USB1: USB Connector

Type: onboard 2.54pitch 10-pin header for two USB ports

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | +5V | 1 | +5V |
| 3 | USBD0- | 3 | USBD0- |
| 5 | USBD0+ | 5 | USBD0+ |
| 7 | GND | 7 | GND |
| 9 | GND | 9 | GND |



USB2: USB Connector

Type: onboard 2.54pitch 10-pin header for two USB ports

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | +5V | 1 | +5V |
| 3 | USBD2- | 3 | USBD3- |
| 5 | USBD2+ | 5 | USBD3+ |
| 7 | GND | 7 | GND |
| 9 | GND | 9 | N.C |



USB3: USB Connector

Type: onboard 2.54pitch 10-pin header for two USB ports

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | +5V | 1 | +5V |
| 3 | USBD4- | 3 | USBD5- |
| 5 | USBD4+ | 5 | USBD5+ |
| 7 | GND | 7 | GND |
| 9 | GND | 9 | N.C |



INV1: LVDS Panel Inverter Connector

Type: onboard 2.0pitch 5-pin wafer

| Pin | Description |
|-----|--------------------|
| 1 | +12V |
| 2 | GND |
| 3 | Backlight on/off |
| 4 | Brightness control |
| 5 | GND |



INV1

LVDS1: LVDS LCD Connector

Type: onboard DF13 30-pin header

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | VDD | 2 | VDD |
| 3 | TX1CLK+ | 4 | TX2CLK+ |
| 5 | TX1CLK- | 6 | TX2CLK- |
| 7 | GND | 8 | GND |
| 9 | TX1D0+ | 10 | TX2D0+ |
| 11 | TX1D0- | 12 | TX2D0- |
| 13 | GND | 14 | GND |
| 15 | TX1D1+ | 16 | TX2D1+ |
| 17 | TX1D1- | 18 | TX2D1- |
| 19 | GND | 20 | GND |
| 21 | TX1D2+ | 22 | TX2D2+ |
| 23 | TX1D2- | 24 | TX2D2- |
| 25 | GND | 26 | GND |
| 27 | TX1D3+ | 28 | TX2D3+ |
| 29 | TX1D3- | 30 | TX2D3- |



LVDS1

VDD could be selected by JVLCD1 in +5V or +3.3V

TMSDS1: DVI CONNECTOR

Type: onboard DF13 20-pin header

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | DVI_VCC | 2 | DVI_VCC |
| 3 | TX0P | 4 | TXCP |
| 5 | TX0M | 6 | TXCM |
| 7 | GND | 8 | GND |
| 9 | TX1P | 10 | 5VDDCCLK |
| 11 | TX1M | 12 | 5VDDCDATA |
| 13 | GND | 14 | GND |
| 15 | TX2P | 16 | DVI_HPD |
| 17 | TX2M | 18 | NC |
| 19 | GND | 20 | NC |

IR1: Infrared (IR) Connector

Type: onboard 2.54pitch 5-pin header

| Pin | Description |
|-----|-------------|
| 1 | +5V |
| 2 | N.C |
| 3 | IRRX |
| 4 | GND |
| 5 | IRTX |



LAN1: Fast Ethernet Connector

Type: onboard 2.54pitch 10-pin header

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | TX+ | 2 | TX- |
| 3 | RX+ | 4 | D2+ |
| 5 | D2- | 6 | RX- |
| 7 | D3+ | 8 | D3- |
| 9 | LAN_GND | 10 | Key |



LLED1: LAN LED Indicator

Type: onboard 1*4pin 2mm header

| Pin | Description |
|-----|-------------|
| 1 | ACT- |
| 2 | ACT+ |
| 3 | LILED- |
| 4 | LILED+ |



Audio1: Audio Interface Port

Type: onboard 2*5pin 2.0mm BOX header


| Pin | Description | Pin | Description |
|-----|--------------|-----|---------------|
| 1 | GND | 2 | Line Right in |
| 3 | Line Left in | 4 | MIC1 |
| 5 | GND | 6 | MIC2 |
| 7 | NC | 8 | LOUT_L |
| 9 | GND | 10 | LOUT_R |



ATX1: ATX Power Connector

Type: onboard 2*10-pin connector

| Pin | Description | Pin | Description |
|-----|-------------|-----|-------------|
| 1 | NC | 11 | NC |
| 2 | NC | 12 | -12V |
| 3 | GND | 13 | GND |
| 4 | VCC | 14 | PSON# |
| 5 | GND | 15 | GND |
| 6 | VCC | 16 | GND |
| 7 | GND | 17 | GND |
| 8 | NC | 18 | -5V |
| 9 | 5VSB | 19 | VCC |
| 10 | +12V | 20 | VCC |



CFD1: Compact Flash Connector

| Pin | Description | Pin | Description |
|------------|--------------------|------------|--------------------|
| 1 | GND | 26 | GND |
| 2 | DATA3 | 27 | DATA11 |
| 3 | DATA4 | 28 | DATA12 |
| 4 | DATA5 | 29 | DATA13 |
| 5 | DATA6 | 30 | DATA14 |
| 6 | DATA7 | 31 | DATA15 |
| 7 | CS#1 | 32 | CS#3 |
| 8 | GND | 33 | GND |
| 9 | GND | 34 | IO READ |
| 10 | GND | 35 | IO WRITE |
| 11 | GND | 36 | +5V |
| 12 | GND | 37 | IRQ15 |
| 13 | +5V | 38 | +5V |
| 14 | GND | 39 | CSEL |
| 15 | GND | 40 | N/C |
| 16 | GND | 41 | IDE RESET |
| 17 | GND | 42 | IO READY |
| 18 | ADDR2 | 43 | N/C |
| 19 | ADDR1 | 44 | +5V |
| 20 | ADDR0 | 45 | DASP |
| 21 | DATA0 | 46 | DIAG |
| 22 | DATA1 | 47 | DATA8 |
| 23 | DATA2 | 48 | DATA9 |
| 24 | N/C | 49 | DATA10 |
| 25 | GND | 50 | GND |



Chapter 3

Appendix

3.1 I/O Map

| Item | Address | Description |
|------|---|-----------------------------------|
| 1 | 0000h-000Fh 0080h-009Fh 00C0h-00DFh | Direct memory access controller |
| 2 | 0020h , 0021h 00A0h , 00A1h | Programmable interrupt Controller |
| 3 | 0040h-0043h 0044h-0047h | System timer |
| 4 | 0060h-0064h | Keyboard controller |
| 5 | 0070h-0073h | System CMOS/real time clock |
| 6 | 00F0h-00FFh | Math Co-Processor |
| 7 | 01F0h-01F7h | Primary IDE |
| 8 | 0274h-0277h | ISAPNP Read Data Port |
| 9 | 0279h , 0A79h | ISAPnP Configuration |
| 10 | 04E8h-04EFh | COM_6 (If use) |
| 11 | 02E8h-02EFh | COM_4 (If use) |
| 12 | 02F8h-02FFh | COM_2 (If use) |
| 13 | 0378h-037Ah | Parallel Port (If use) |
| 14 | 03B0h-03BFh | MDA/MGA |
| 15 | 03C0h-03CFh | EGA/VGA |
| 16 | 03D4h-03D9h | CGA CRT 暂存器 |
| 17 | 04F8h-04FFh | COM_5 (If use) |
| 18 | 03E8h-03EFh | COM_3 (If use) |
| 19 | 03F0h-03F7h | Floppy Diskette |
| 20 | 03F6h-03F6h | Primary IDE |
| 21 | 03F8h-03FFh | COM_1 (If use) |
| 22 | 0400h-041F | South Bridge SMB |
| 23 | 04D0h-04D1h | IRQ Edge/level control ports |
| 24 | 0500h-053Fh | South Bridge GPIO |
| 25 | 0800h-087Fh | ACPI |
| 26 | 0A00h-0A07h | PME |
| 27 | 0A10h-0A17h | Hardware Monitor |
| 28 | 0CF8h | PCI Configuration address |
| 29 | 0CFCh | PCI Configuration Data |
| 30 | | |

3.2 IRQ Map

| Item | IRQ | Description |
|------|--------|-------------------------------|
| 1 | IRQ_0 | System Timer |
| 2 | IRQ_1 | Keyboard Controller |
| 3 | IRQ_2 | VGA and Link to Secondary PIC |
| 4 | IRQ_3 | COM 2 |
| 5 | IRQ_4 | COM 1 |
| 6 | IRQ_5 | PCI Device |
| 7 | IRQ_6 | Floppy Controller |
| 8 | IRQ_7 | Parallel Port |
| 9 | IRQ_8 | CMOS/RTC Timer |
| 10 | IRQ_9 | ACPI |
| 11 | IRQ_10 | COM 4/6 |
| 12 | IRQ_11 | COM 3/5 |
| 13 | IRQ_12 | PS/2 Mouse |
| 14 | IRQ_13 | FPU exception |
| 15 | IRQ_14 | IDE Controller |
| 16 | IRQ_15 | PCI Express Controller |

Any advice or comments about our products and service, or anything we can help you with please don't hesitate to contact with us. We will do our best to support your products, projects and business.



Address: Global American, Inc.
17 Hampshire Drive
Hudson, NH 03051

Telephone: Toll Free (U.S. Only) 800-833-8999
(603)886-3900

FAX: (603)886-4545

Website: <http://www.globalamericaninc.com>
E-Mail: salesinfo@globalamericaninc.com

